



MICROWAVE COMPONENT POWER CABLE ASSEMBLY FOR 200/400W OUTDOOR POWER SUPPLY



TYPICAL SPECIFICATIONS

Electrical

J1 connected to an AC electrical outlet: for 95 ~ 265 VAC

J2 connected to Power Supply

Mechanical

J1 connector (2pin) Commercial 110/220VAC, 15A Plug Connector

J2 connector (3pin) MS3106A 14S-1S, Female

Length between J1 and J2: > 1m (depending on request)

Weight: < 220g (for 2m cable)

Color: Black

Environmental

Operating temperature -50 to +100 deg Celsius


Applications

Used to connect 200W and 400W AD/DC outdoor power supply to an AC electrical outlet.

J2 connector is water-proof and can be used outdoors.

HOW TO ORDER

PC-110-1

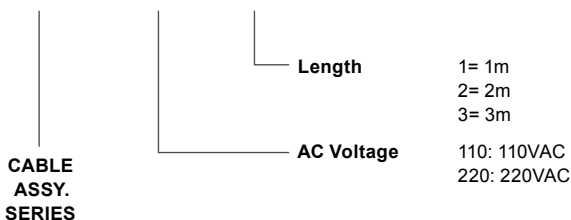

Ka 10/20W BUC + Power Supply + Cable Assembly Configuration

