



Norsat
International Inc.

Intelligent Satellite Solutions



MICROWAVE COMPONENT


KU-BAND WAVEGUIDE DIPLEXER



TYPICAL SPECIFICATIONS (WGD-001)

Rx Passband	10.95 to 12.75 GHz
Tx Passband	13.75 to 14.5 GHz
Rx Passband Insertion Loss at Bandedge	0.35 dB max
Tx Passband Insertion Loss at Bandedge	0.25 dB max
Passband Return Loss (all ports)	1.25 : 1 max
Rejection from 10.95 to 12.75 GHz	35 dB min
Rejection from 13.75 to 14.5 GHz	70 dB min
Flanges	WR 75

MECHANICAL DIAGRAM

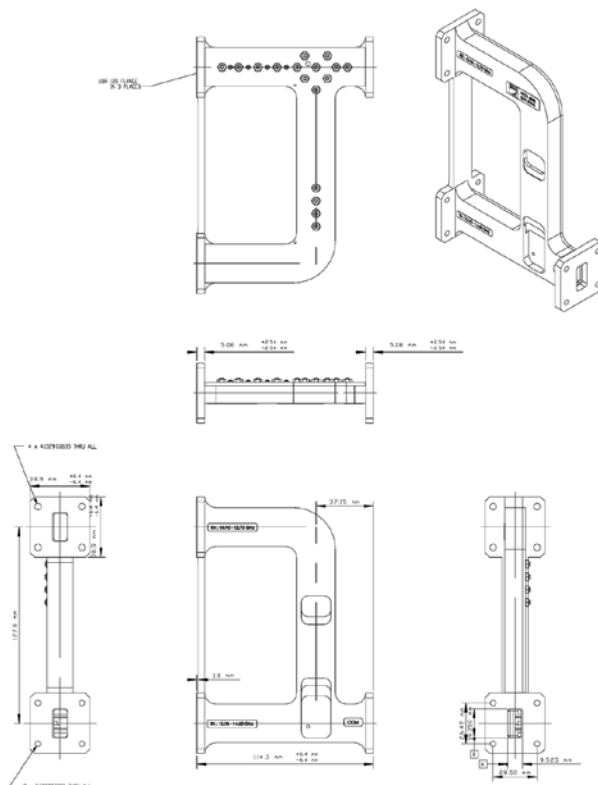

Americas
tel + 1.800.644.4562
fax + 1.604.821.2801

Asia
tel +1 604.821.2835
fax +1 604.821.2801

Europe, Middle East & Africa
tel + 44.1522.730800
fax + 44.1522.730927

Online
info@norsat.com
www.norsat.com