



BUC ELEMENT SERIES C-BAND 40W BUC-ELMTC040



NORSAT ELEMENT SERIES BUCS


Norsat Satellite Communication solutions are renowned for their high quality, reliability, and innovation. The C Band ELEMENT series offers small size and weight with a variety of frequency options that make it ideal for VSAT applications.

FREQUENCY BANDS

Model	BUC-ELMTC040-S	BUC-ELMTC040-P	BUC-ELMTC040-I
Output frequency (Mhz)	5.850- 6.425 GHz	6.425- 6.725 GHz	6.725-7.025 GHz
L.O. frequency (GHz)	4.90 GHz	5.275 GHz	5.75 GHz
Input frequency (GHz)	950 – 1525 MHz	1150-1450 MHz	975-1275 MHz

HOW TO ORDER

BUC-ELMTC040-PN

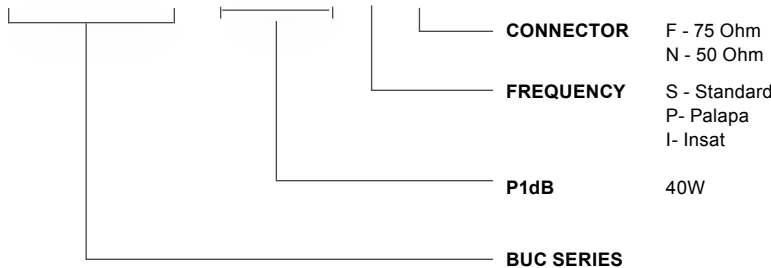

C-BAND 40W BUC-ELMTC040

RF SPECIFICATIONS

Output Power (P1db)	46 dBm min
External Reference	10MHz
Reference Power Level	-5 dBm to +5dBm
Phase Noise (SSB)	-60 dBc/Hz at 100Hz
	-70 dBc/Hz at 1kHz
	-80 dBc/Hz at 10kHz
	-90 dBc/Hz at 100kHz
Linear gain	72 dB
Gain flatness	+/-4.0 dB p-p, max over full band
	+/- 1.5 dB p-p over 54MHz
Gain variation over temperature	-4.0 dB p-p over operating range
Output Spurious	-In Band
	-Out Band
	-60 dBc
	-50 dBc

INTERFACES

Input VSWR	2.0 : 1
Output VSWR	2.0 : 1
Input Connector	N: 50 Ω, F: 75 Ω
Output Connector	CPR137G

ENVIRONMENTAL & PHYSICAL


Temperature (operational)	-40 C to +55 C
Humidity (operational)	0 – 100% condensing
Dimensions (L x W x H)	DC
	AC
Weight	DC
	AC
Enclosed Accessories	O-Ring (1 pc)
	Screws (4 pc)

POWER

Power requirements	+36 to +60 VDC over IFL
Power Consumption	280W DC max

* M&C optional

MECHANICAL DIAGRAM

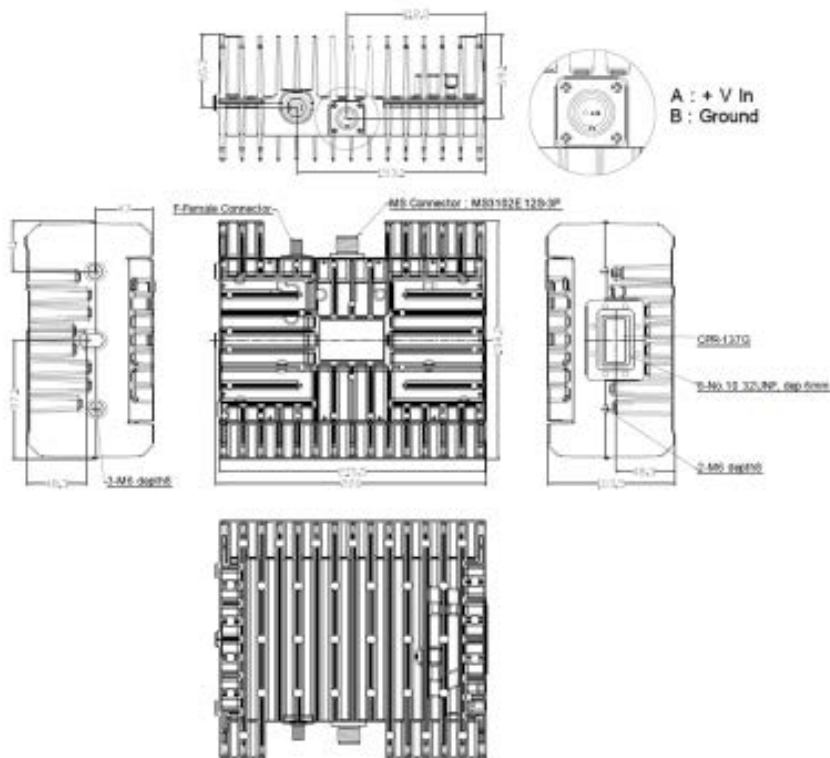

Norsat
International Inc.

North America
+1 800 644 4562

Asia Pacific
+1 604 821 2813

Europe, Middle East & Africa
+44 1522 730 800

South America
+1 604 821 2835

Online
sales@norsat.com
www.norsat.com