




BUC

KU-BAND 160W

ATOMBKU160

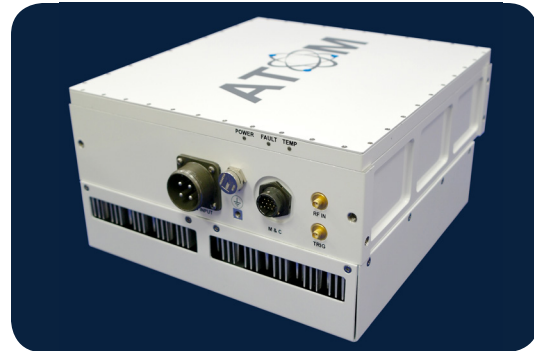

NORSAT ATOM SERIES BUCS

The Norsat ATOM series of block upconverters (BUC) are among the smallest, lightest, and most energy efficient transmitters available. The high efficiency of ATOM reduces power consumption significantly, delivering considerable operational cost savings over the lifetime of the device.

Another innovative communication solution from Norsat.

RF CONFIGURATIONS

Transmit Frequency

Standard band	14.0 to 14.5 GHz
Extended band	13.75 to 14.5 GHz
Wide band	13.00 to 17.5 GHz*

Input Frequency

Standard band	950 to 1450 MHz
Extended band	950 to 1700 MHz

*Contact factory for custom band options.

KEY FEATURES

Compared to equivalent products, ATOM series BUCs are:

- Up to 68% smaller and lighter
- Up to 60% more power efficient
- More flexible with RF and configuration options

OPTIONS


The following items are standard: White paint, N-Type input connector, WR-75 waveguide output, Fan cooling, DC Power

Available options include: Baseplate Cooling, SMA Input Connector, WR-62 Waveguide Output, 1 Phase AC

Accessories: Power Supply, Bracket, Waveguides, Cables, Adaptors

HOW TO ORDER

ATOMBKU160S

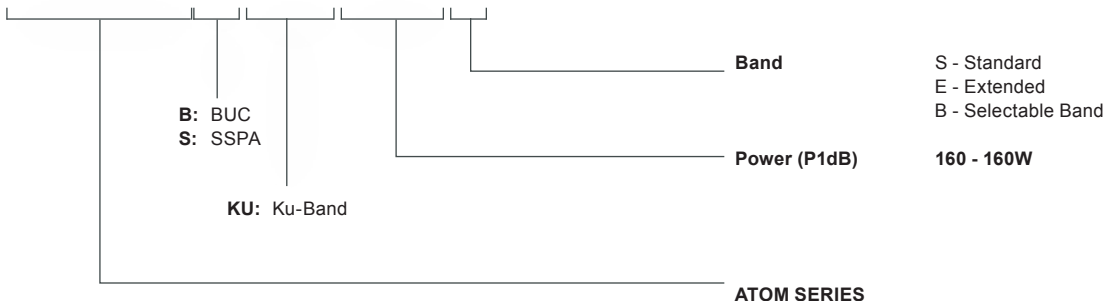

KU-BAND 160W BUC-ATOMBKU160

RF SPECIFICATIONS

Power Output (P1dB)	160W typical
Noise Figure	15 dB
Phase noise	-72 dBc/Hz at 1 KHz -82 dBc/Hz at 10 KHz -92 dBc/Hz at 100 kHz -102 dBc/Hz at 1 MHz
Fwd Monitor (15 dB Range) @ CF	± 1.0 dB
Conversion gain	60 dB min
Gain Variation over operating band	6 dB max p-p
Gain variation over any 40 MHz	1.5 dB max p-p
Gain variation over temperature	3 dB max p-p
Input VSWR	2.0:1
Output VSWR	2.0:1
Spurious @ rated power	-50 dBc
AM/PM Conversion @2dB below	2.5°/dB rated power
2nd Harmonic @ 3dB below rated power	-45 dBc

INTERFACES

RF Input connector	N-Type
RF Output connector	WR-75 (WR-62 above 15.5 GHz)

MONITOR & CONTROL

M&C Interface	RS-485
M&C Connector	MIL-26482 Series 1 Receptacle, Shell Size 12, 10
Mute Control	Fully configurable (mute enable: high or low, mute default: enabled or disabled)
Low	0.0 - 0.8V
High	3.0 - 5.0V

ENVIRONMENTAL & PHYSICAL

Operating Temperature with fans	-40 to +60°C (-40° to +140° F)
Storage Temperature	-54 to + 80°C (-65° to + 176° F)
Outline dimensions Component configuration	317.5 L x 330.2 W x 168.9 H mm (12.5"x 13.0" x 6.65")
Weight	15.06 kg (33.2lbs)

POWER

Input voltage	20 – 56 VDC
Power Consumption with fans	880W max @ P1dB 775W max @ 3dB backoff from P1dB 710W max @ Quiescent (no signal input) 100W muted
Power Connector	MIL-26482 Series 1 receptacle Shell size 12, 4 pins